


## FL3S DAC Board - INSTALLATION MANUAL (DAC보드 설치 방법)


1. Open the unit.
2. There are two cables supplied with the DAC board. Fit the short cable and the long cable on the DAC board as shown on the below picture.  
DAC보드와 함께 제공된 두개의 케이블을 아래 사진처럼 긴 선과 짧은 선을 구별하여 연결하십시오.




3. Remove the cover on the back panel for the DAC board, and install the DAC board as shown below.  
본체 후면의 DAC 삽입구를 열고 사진 처럼 DAC 보드를 설치하십시오.

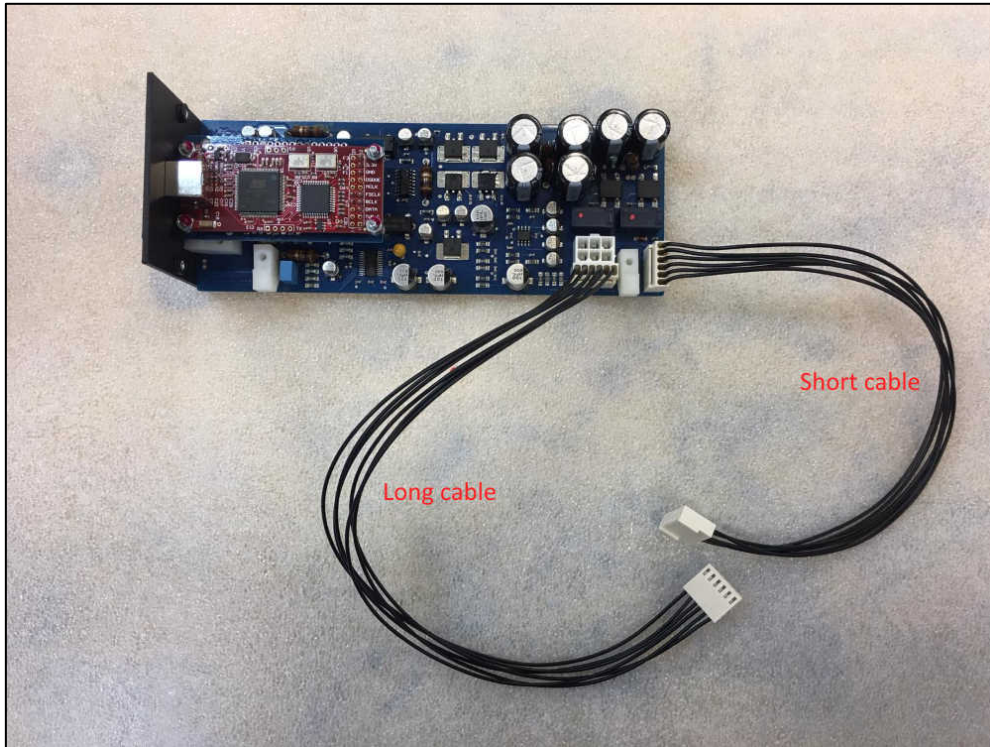

4. On DAC board there are two cables; connect the short cable to the control board as below.  
짧은 케이블을 아래 사진처럼 콘트롤 보드 (Control Board)에 연결하십시오.

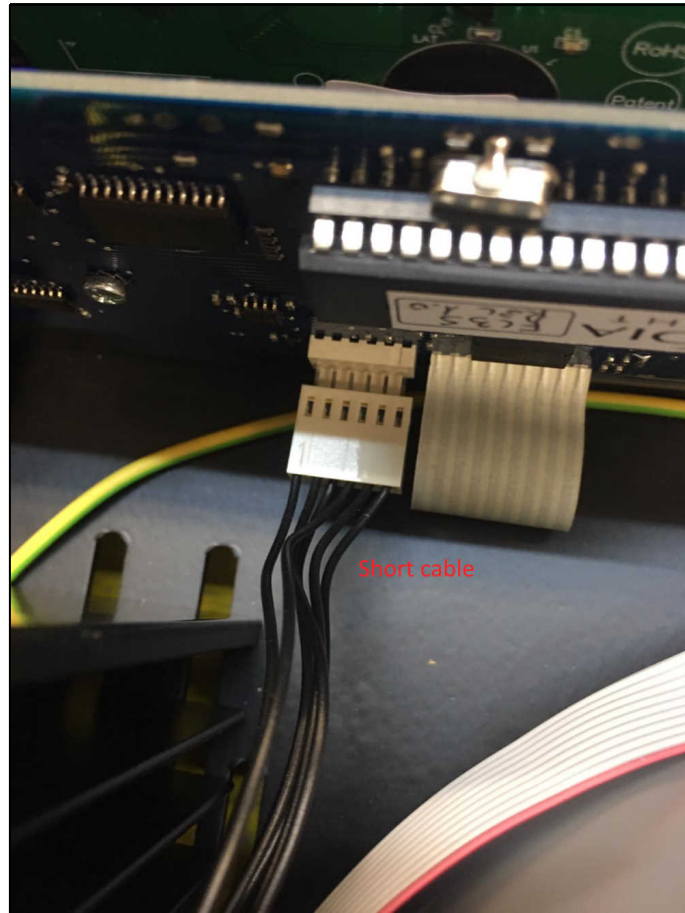


5. As shown on the below picture, localize the connector on the mother board, and connect the long cable from the DAC board to that connector.  
아래 사진처럼 메인보드의 연결단자를 찾은 다음, 긴 케이블을 그 단자에 연결하십시오.

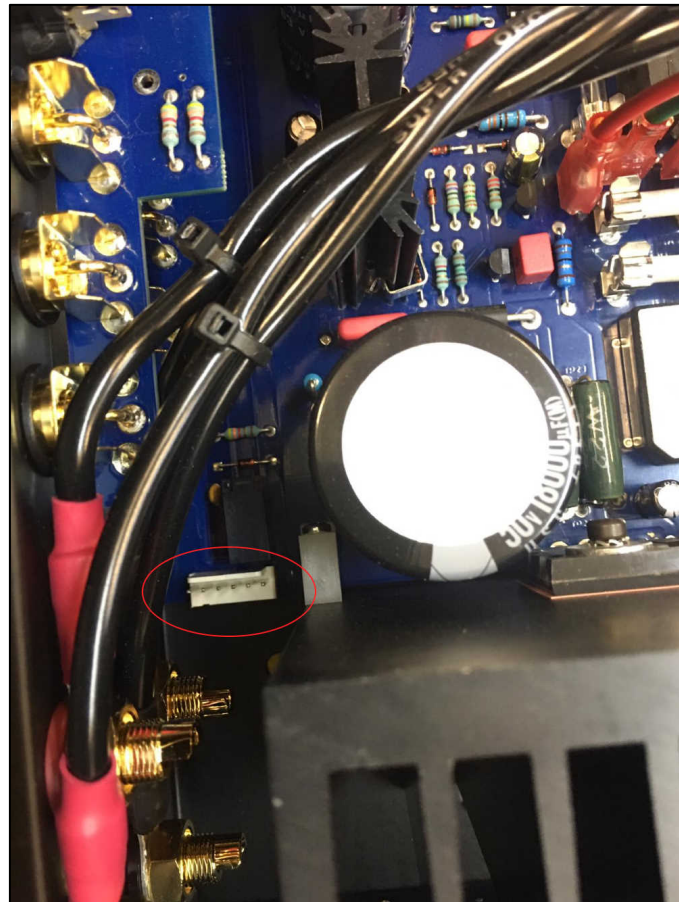





The below pictures show the long cable from the DAC board installed on the mother board.

아래 사진은 긴 케이블이 제대로 연결된 DAC보드와 메인 보드를 보여 줍니다.

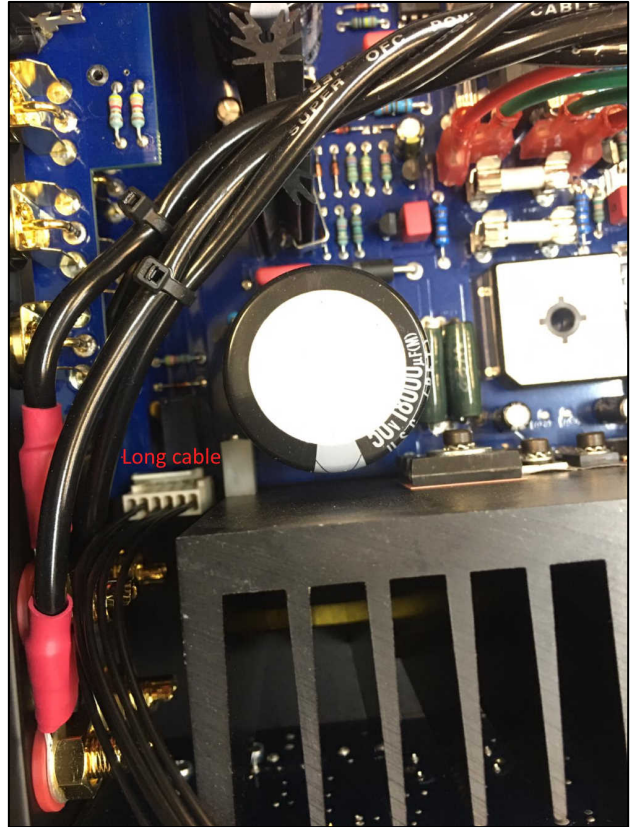

6. From the transformer, there is a **6 pins connector** as shown on the below left picture; connect it to the connector on the DAC board as shown on the left picture.

전원 연결: 아래 사진처럼 파워 트랜스포머에 있는 6가닥의 케이블을 DAC 보드의 6핀자에 연결하십시오.

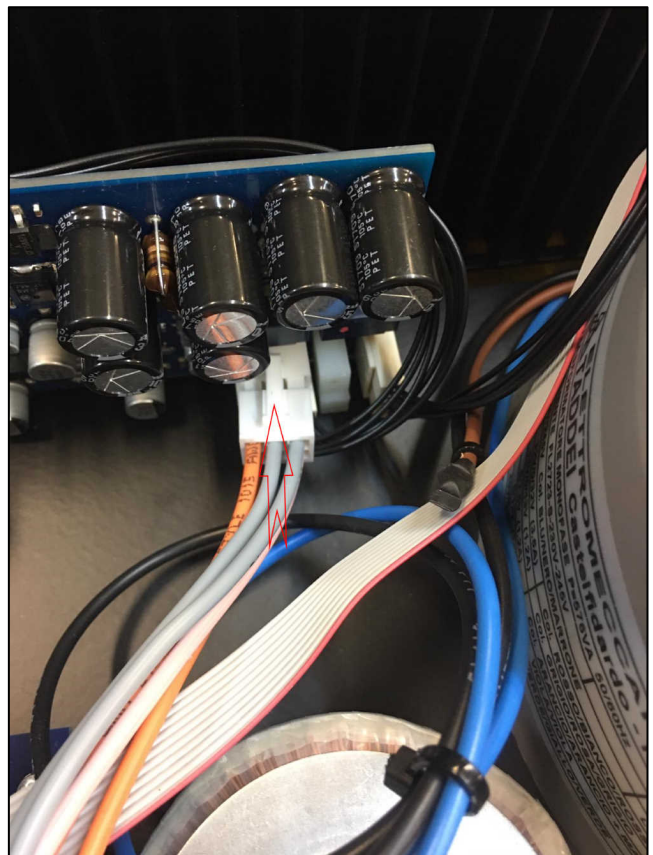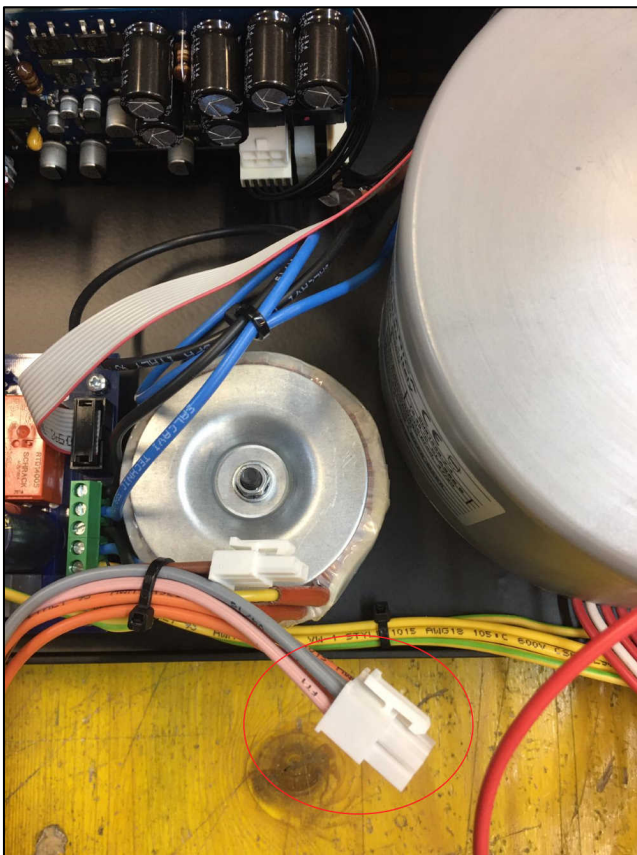

7. Close the unit.